


# Medical Image Processor

Image processing, display and recording  
All-in-one

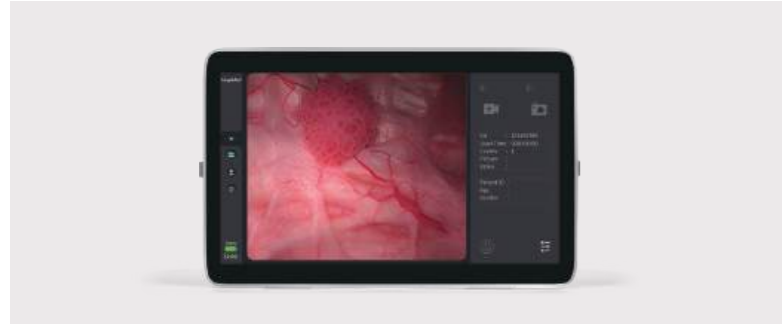

## Specification

<b>Model</b>	<b>MS-8</b>
Dimension	386.4 (h) x 253.6 (w) x 38.5 (d) mm
Weight	2.7 kg
Display size	15.6 inches
Display resolution	1080P(1920*1080)px
Display type	TFT-LCD, touch screen
Function	Dual view, WIFI, Brightness control, Contrast control, Using time calculator, etc.
Working time	Maximum continuous working time 5h
Memory capacity	Built-in SD card standard 64 GB



Brochure  
**Single-use  
Cystoscope**



## Ordering information

Product		Item code
<b>Single-use Cystoscope</b>		
CY-M40H	EU Standard (Anti-logic Deflection)	2017B-PA015
	US Standard (Logic Deflection)	2017B-PA026
CY-M52H	EU Standard (Anti-logic Deflection)	2017B-PA014
	US Standard (Logic Deflection)	2017B-PA025
<b>Medical image processor</b>		
MS-8		2288B-PA001

Specifications, design and accessories are subject to change without any notice or obligation on the part of the manufacturer.

**HugeMed**

**Shenzhen HugeMed Medical Technical Development Co., Ltd.**  
415, 416-1, 516-1, Building 2, No.1, Mawu Road, Baoan Community, Yuanshan Street,  
Longgang District, Shenzhen, Guangdong, 518115, China

+86-755-22275833    +86-755-22275833    info@hugemed.net

For more information  
please visit our website:  
[www.hugemed.net](http://www.hugemed.net)



**HugeMed**

P/N: ENG\_EU\_CATA\_UR\_FM\_MEGA\_MS8\_231015V1.1

# Single-use Cystoscope



## Standard Configuration Suction Function

The suction function helps to clear the visual field by removing debris and fluid, providing better visualization of the area being examined during the cystoscopy.



## Easier Cystoscopy for both Doctor and Patient

The HugeMed™ single-use cystoscope is single-use, portable and easy to operate, which are helpful for operating cystoscopy in the OPD or community hospital where could not equipped the transitional heavy and expensive devices. Meanwhile, the flexibility makes patients more comfortable, even without anesthesia.

### Feature



Single-use



Portable



Cost-effective



No Cross-infection



Always Ready To Go



### CY-M52H

Outer diameter / Working Channel diameter  
15.0 / 6.6Fr (5.0 / 2.2mm)

A general model that is always ready for your need without any sterilization processing waiting. The HD output capability brings more details for your daily examination and biopsy.



### CY-M40H

Outer diameter / Working Channel diameter  
12.0 / 3.6Fr (4.0 / 1.2mm)

Slimmer allows for smoother and easier insertion, especially for patients with smaller urethras, such as children and women, as well as in patients with strictures or other urethral abnormalities.

#### Deflection

210° Up/ Down

#### Field of View

120°

#### Total Length

605mm

#### Working Length

350mm

#### Direction of View

0°



## Upgraded Tip

The brand-new generation of the CMOS sensor is offering a brand-new experience of visualization. The bullet tip design leads to a smoother insertion, reducing the pain for the patients.



## 210° up and down Bending Angle

The 210° bending degree provides better access and visualization of the bladder including the trigonal region, leading to a more comprehensive examination and more accurate diagnosis and treatment.

